



1

2

3

4

**Document Number: DSP1052**

**Date: 2010-04-22**

**Version: 1.0.1**

5 **Computer System Profile**

6 **Document Type: Specification**

7 **Document Status: DMTF Standard**

8 **Document Language: en-US**

## 9 Copyright Notice

10 Copyright © 2006–2010 Distributed Management Task Force, Inc. (DMTF). All rights reserved.

11 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems  
12 management and interoperability. Members and non-members may reproduce DMTF specifications and  
13 documents, provided that correct attribution is given. As DMTF specifications may be revised from time to  
14 time, the particular version and release date should always be noted.

15 Implementation of certain elements of this standard or proposed standard may be subject to third party  
16 patent rights, including provisional patent rights (herein "patent rights"). DMTF makes no representations  
17 to users of the standard as to the existence of such rights, and is not responsible to recognize, disclose,  
18 or identify any or all such third party patent right, owners or claimants, nor for any incomplete or  
19 inaccurate identification or disclosure of such rights, owners or claimants. DMTF shall have no liability to  
20 any party, in any manner or circumstance, under any legal theory whatsoever, for failure to recognize,  
21 disclose, or identify any such third party patent rights, or for such party's reliance on the standard or  
22 incorporation thereof in its product, protocols or testing procedures. DMTF shall have no liability to any  
23 party implementing such standard, whether such implementation is foreseeable or not, nor to any patent  
24 owner or claimant, and shall have no liability or responsibility for costs or losses incurred if a standard is  
25 withdrawn or modified after publication, and shall be indemnified and held harmless by any party  
26 implementing the standard from any and all claims of infringement by a patent owner for such  
27 implementations.

28 For information about patents held by third-parties which have notified the DMTF that, in their opinion,  
29 such patent may relate to or impact implementations of DMTF standards, visit  
30 <http://www.dmtf.org/about/policies/disclosures.php>.

31

# CONTENTS

33	Foreword	5
34	Introduction .....	6
35	1 Scope .....	7
36	2 Normative References.....	7
37	3 Terms and Definitions .....	8
38	4 Symbols and Abbreviated Terms .....	8
39	5 Synopsis.....	9
40	6 Description .....	9
41	7 Implementation.....	10
42	7.1 Computer System .....	10
43	7.2 Management of Computer System Components .....	13
44	7.3 Software Asset Management.....	14
45	7.4 Network Interface Management.....	14
46	7.5 Record Logs.....	15
47	7.6 Management of Protocol Services.....	15
48	7.7 System Lifecycle Management.....	16
49	7.8 Smash Collections Profile.....	18
50	8 Methods.....	18
51	8.1 CIM_ComputerSystem.RequestStateChange( ) .....	18
52	8.2 CIM_TimeService.ManageTime( ).....	19
53	8.3 Profile Conventions for Operations.....	20
54	8.4 CIM_ComputerSystem.....	20
55	8.5 CIM_ElementCapabilities .....	21
56	8.6 CIM_EnabledLogicalElementCapabilities.....	21
57	8.7 CIM_HostedService .....	21
58	8.8 CIM_ServiceAffectsElement .....	22
59	8.9 CIM_TimeService .....	22
60	9 Use Cases.....	22
61	9.1 Object Diagrams .....	22
62	9.2 Find a Dedicated System.....	24
63	9.3 Correlate Instrumented Systems .....	24
64	9.4 Enable a System.....	25
65	9.5 Disable a System.....	25
66	9.6 Reset a System.....	25
67	9.7 Manage the System Boot Configuration.....	25
68	9.8 Determine the Number of Processors in the System .....	25
69	9.9 Determine If Time Management Is Supported.....	26
70	9.10 Get Time for System .....	26
71	9.11 Set Time for System .....	26
72	9.12 Determining If ElementName Can Be Modified.....	26
73	9.13 Determining If State Management Is Supported .....	26
74	10 CIM Elements.....	27
75	10.1 CIM_ComputerSystem.....	27
76	10.2 CIM_ElementCapabilities .....	28
77	10.3 CIM_EnabledLogicalElementCapabilities.....	28
78	10.4 CIM_HostedService .....	28
79	10.5 CIM_ServiceAffectsElement .....	29
80	10.6 CIM_TimeService .....	29
81	ANNEX A (Informative) Change Log .....	30

83 **Figures**

84	Figure 1 – Computer System Profile: Class Diagram .....	10
85	Figure 2 – Logical Topology.....	23
86	Figure 3 – Network Interfaces.....	24

87

88 **Tables**

89	Table 1 – Referenced Profiles .....	9
90	Table 2 – Predefined Identifiers for a Computer System.....	11
91	Table 3 – CIM_ComputerSystem.RequestStateChange( ) Method: Return Code Values.....	19
92	Table 4 – CIM_ComputerSystem.RequestStateChange( ) Method: Parameters.....	19
93	Table 5 – CIM_TimeService.ManageTime( ) Method: Return Code Values .....	20
94	Table 6 – CIM_TimeService.ManageTime( ) Method: Parameters .....	20
95	Table 7 – Operations: CIM_ComputerSystem.....	20
96	Table 8 – Operations: CIM_ElementCapabilities.....	21
97	Table 9 – Operations: CIM_HostedService .....	22
98	Table 10 – Operations: CIM_ServiceAffectsElement .....	22
99	Table 11 – CIM Elements: Computer System Profile .....	27
100	Table 12 – Class: CIM_ComputerSystem.....	27
101	Table 13 – Class: CIM_ElementCapabilities.....	28
102	Table 14 – Class: CIM_EnabledLogicalElementCapabilities.....	28
103	Table 15 – Class: CIM_HostedService .....	28
104	Table 16 – Class: CIM_ServiceAffectsElement .....	29
105	Table 17 – Class: CIM_TimeService .....	29

106

107

## Foreword

108 The *Computer System Profile* (DSP1052) was prepared by the Server Management Working Group and  
109 Physical Platform Profiles Working Group of the DMTF.

110 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems  
111 management and interoperability. For information about the DMTF, see <http://www.dmtf.org>.

### 112 **Acknowledgments**

113 The DMTF acknowledges the following individuals for their contributions to this document:

114 Editors:

- 115 • Hemal Shah – Broadcom
- 116 • Aaron Merkin – IBM
- 117 • Jeff Hilland – HP

118 Contributors:

- 119 • Jon Hass – Dell
- 120 • Khachatur Papanyan – Dell
- 121 • Jeff Hilland – HP
- 122 • Christina Shaw – HP
- 123 • Aaron Merkin – IBM
- 124 • Perry Vincent – Intel
- 125 • John Leung – Intel
- 126 • Hemal Shah – Broadcom
- 127 • David Hines – Intel
- 128 • Jim Davis – WBEM Solutions

129

130

## Introduction

131 The information in this specification should be sufficient for a provider or consumer of this data to  
132 unambiguously identify the classes, properties, methods, and values that shall be instantiated and  
133 manipulated to represent and manage a basic computer system and subsystems that are modeled using  
134 the DMTF Common Information Model (CIM) core and extended model definitions.

135 The target audience for this specification is implementers who are writing CIM-based providers or  
136 consumers of management interfaces that represent the components described in this document.

137

## 138 Document Conventions

### 139 Experimental Material

140 Experimental material has yet to receive sufficient review to satisfy the adoption requirements set forth by  
141 the DMTF. Experimental material is included in this document as an aid to implementers who are  
142 interested in likely future developments. Experimental material may change as implementation  
143 experience is gained. It is likely that experimental material will be included in an upcoming revision of the  
144 document. Until that time, experimental material is purely informational.

145 The following typographical convention indicates experimental material:

---

146 **EXPERIMENTAL**

147 Experimental material appears here.

148 **EXPERIMENTAL**

---

149 In places where this typographical convention cannot be used (for example, tables or figures), the  
150 "EXPERIMENTAL" label is used alone.

151

# Computer System Profile

## 152 1 Scope

153 The *Computer System Profile* is the autonomous profile that defines the minimum top-level object model  
154 needed to define a basic computing platform. This profile is intended to be the base profile for  
155 specialization for the modeling of specific types of computer systems such as virtual machines, servers,  
156 desktops, and mobile computers. The *Computer System Profile* identifies component profiles for  
157 integration of additional management functionality including system configuration, boot control, and other  
158 provisioning capabilities.

## 159 2 Normative References

160 The following referenced documents are indispensable for the application of this document. For dated or  
161 versioned references, only the edition cited (including any corrigenda or DMTF update versions) applies.  
162 For references without a date or version, the latest published edition of the referenced document  
163 (including any corrigenda or DMTF update versions) applies.

164 DMTF DSP0004, *CIM Infrastructure Specification 2.5*,  
165 [http://www.dmtf.org/standards/published\\_documents/DSP0004\\_2.5.pdf](http://www.dmtf.org/standards/published_documents/DSP0004_2.5.pdf)

166 DMTF DSP0200, *CIM Operations over HTTP 1.3*,  
167 [http://www.dmtf.org/standards/published\\_documents/DSP0200\\_1.3.pdf](http://www.dmtf.org/standards/published_documents/DSP0200_1.3.pdf)

168 DMTF DSP1001, *Management Profile Specification Usage Guide 1.0*,  
169 [http://www.dmtf.org/standards/published\\_documents/DSP1001\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1001_1.0.pdf)

170 DMTF DSP1005, *CLP Service Profile 1.0*,  
171 [http://www.dmtf.org/standards/published\\_documents/DSP1005\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1005_1.0.pdf)

172 DMTF DSP1006, *SMASH Collections Profile 1.0*,  
173 [http://www.dmtf.org/standards/published\\_documents/DSP1006\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1006_1.0.pdf)

174 DMTF DSP1009, *Sensors Profile 1.0*,  
175 [http://www.dmtf.org/standards/published\\_documents/DSP1009\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1009_1.0.pdf)

176 DMTF DSP1010, *Record Log Profile 1.0*,  
177 [http://www.dmtf.org/standards/published\\_documents/DSP1010\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1010_1.0.pdf)

178 DMTF DSP1012, *Boot Control Profile 1.0*,  
179 [http://www.dmtf.org/standards/published\\_documents/DSP1012\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1012_1.0.pdf)

180 DMTF DSP1014, *Ethernet Port Profile 1.0*,  
181 [http://www.dmtf.org/standards/published\\_documents/DSP1014\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1014_1.0.pdf)

182 DMTF DSP1016, *Telnet Service Profile 1.0*,  
183 [http://www.dmtf.org/standards/published\\_documents/DSP1016\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1016_1.0.pdf)

184 DMTF DSP1017, *SSH Service Profile 1.0*,  
185 [http://www.dmtf.org/standards/published\\_documents/DSP1017\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1017_1.0.pdf)

186 DMTF DSP1022, *CPU Profile 1.0*,  
187 [http://www.dmtf.org/standards/published\\_documents/DSP1022\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1022_1.0.pdf)

188 DMTF DSP1023, *Software Inventory Profile 1.0*,  
189 [http://www.dmtf.org/standards/published\\_documents/DSP1023\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1023_1.0.pdf)

- 190 DMTF DSP1024, *Text Console Redirection Profile 1.0*,  
191 [http://www.dmtf.org/standards/published\\_documents/DSP1024\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1024_1.0.pdf)
- 192 DMTF DSP1025, *Software Update Profile 1.0*,  
193 [http://www.dmtf.org/standards/published\\_documents/DSP1025\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1025_1.0.pdf)
- 194 DMTF DSP1026, *System Memory Profile 1.0*,  
195 [http://www.dmtf.org/standards/published\\_documents/DSP1026\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1026_1.0.pdf)
- 196 DMTF DSP1033, *Profile Registration Profile 1.0*,  
197 [http://www.dmtf.org/standards/published\\_documents/DSP1033\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1033_1.0.pdf)
- 198 DMTF DSP1036, *IP Interface Profile 1.0*,  
199 [http://www.dmtf.org/standards/published\\_documents/DSP1036\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1036_1.0.pdf)
- 200 DMTF DSP1037, *DHCP Client Profile 1.0*,  
201 [http://www.dmtf.org/standards/published\\_documents/DSP1037\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1037_1.0.pdf)
- 202 DMTF DSP1038, *DNS Client Profile 1.0*,  
203 [http://www.dmtf.org/standards/published\\_documents/DSP1038\\_1.0.pdf](http://www.dmtf.org/standards/published_documents/DSP1038_1.0.pdf)
- 204 ISO/IEC Directives, Part 2, *Rules for the structure and drafting of International Standards*  
205 <http://isotc.iso.org/livelink/livelink.exe?func=ll&objId=4230456&objAction=browse&sort=subtype>

### 206 **3 Terms and Definitions**

207 In this document, some terms have a specific meaning beyond the normal English meaning. Those terms  
208 are defined in this clause.

209 The terms "shall" ("required"), "shall not," "should" ("recommended"), "should not" ("not recommended"),  
210 "may," "need not" ("not required"), "can" and "cannot" in this document are to be interpreted as described  
211 in [ISO/IEC Directives, Part 2](#), Annex H. The terms in parenthesis are alternatives for the preceding term,  
212 for use in exceptional cases when the preceding term cannot be used for linguistic reasons. Note that  
213 [ISO/IEC Directives, Part 2](#), Annex H specifies additional alternatives. Occurrences of such additional  
214 alternatives shall be interpreted in their normal English meaning.

215 The terms "clause," "subclause," "paragraph," and "annex" in this document are to be interpreted as  
216 described in [ISO/IEC Directives, Part 2](#), Clause 5.

217 The terms "normative" and "informative" in this document are to be interpreted as described in [ISO/IEC](#)  
218 [Directives, Part 2](#), Clause 3. In this document, clauses, subclauses, or annexes labeled "(informative)" do  
219 not contain normative content. Notes and examples are always informative elements.

220 For the purposes of this document, the terms defined in [DSP0004](#), [DSP0200](#), [DSP1001](#), and [DSP1033](#)  
221 apply to this document.

### 222 **4 Symbols and Abbreviated Terms**

223 The following abbreviations are used in this document.

#### 224 **4.1**

##### 225 **IP**

226 Internet Protocol

#### 227 **4.2**

##### 228 **SSH**

229 Secure Shell

## 230 5 Synopsis

231 **Profile Name:** Computer System

232 **Version:** 1.0.1

233 **Organization:** DMTF

234 **CIM Schema Version:** 2.20

235 **Central Class:** CIM\_ComputerSystem

236 **Scoping Class:** CIM\_ComputerSystem

237 This abstract profile specification shall not be directly implemented; implementations shall be based on a  
238 profile specification that specializes the requirements of this profile.

239 The *Computer System Profile* is an autonomous profile that provides the capability to manage a general-  
240 purpose computer system. It is an appropriate target for management for clients that are interested in  
241 performing management tasks that are common across diverse computing platforms such as virtual  
242 machines, servers, and desktop platforms.

243 The Central Class of the *Computer System Profile* shall be CIM\_ComputerSystem. The Central Instance  
244 shall be an instance of CIM\_ComputerSystem. The Scoping Class shall be CIM\_ComputerSystem. The  
245 Scoping Instance shall be the Central Instance. Table 1 lists profiles upon which this profile has a  
246 dependency. The list in Table 1 is not the complete list of profiles that are allowed to be associated with  
247 the *Computer System Profile*, as dictated by the requirements of those profiles. Other profiles shall not be  
248 prohibited from being associated with or scoped to the ComputerSystem Central Instance of this profile.

249

**Table 1 – Referenced Profiles**


Profile Name	Organization	Version	Relationship	Behavior
Boot Control	DMTF	1.0	Optional	See 7.7.2.
CLP Service	DMTF	1.0	Optional	See 7.6.1. EXPERIMENTAL
CPU	DMTF	1.0	Optional	See 7.2.1.
DHCP Client	DMTF	1.0	Optional	See 7.4.3.
DNS Client	DMTF	1.0	Optional	See 7.4.4.
Ethernet Port	DMTF	1.0	Optional	See 7.4.1.
IP Interface	DMTF	1.0	Optional	See 7.4.2.
Record Log	DMTF	1.0	Optional	See 7.5.
Sensors	DMTF	1.0	Optional	See 7.2.3.
SMASH Collections	DMTF	1.0	Optional	See 7.8.
Software Inventory	DMTF	1.0	Optional	See 7.3.1.
Software Update	DMTF	1.0	Optional	See 7.3.2. EXPERIMENTAL
SSH Service	DMTF	1.0	Optional	See 7.6.2.
System Memory	DMTF	1.0	Optional	See 7.2.2.
Telnet Service	DMTF	1.0	Optional	See 7.6.3.

## 250 6 Description

251 The *Computer System Profile* is an autonomous profile that defines the minimum top-level object model  
252 needed to model computer systems and related software. Other profiles add additional management  
253 objects to this basic system model to provide system configuration, boot control, and other provisioning

254 capabilities. CIM\_ComputerSystem represents the computer system. CIM\_TimeService provides the  
 255 ability to manage the system time.

256 Figure 1 presents the class schema for the *Computer System Profile*. For simplicity, the prefix CIM\_ has  
 257 been removed from the names of the classes.

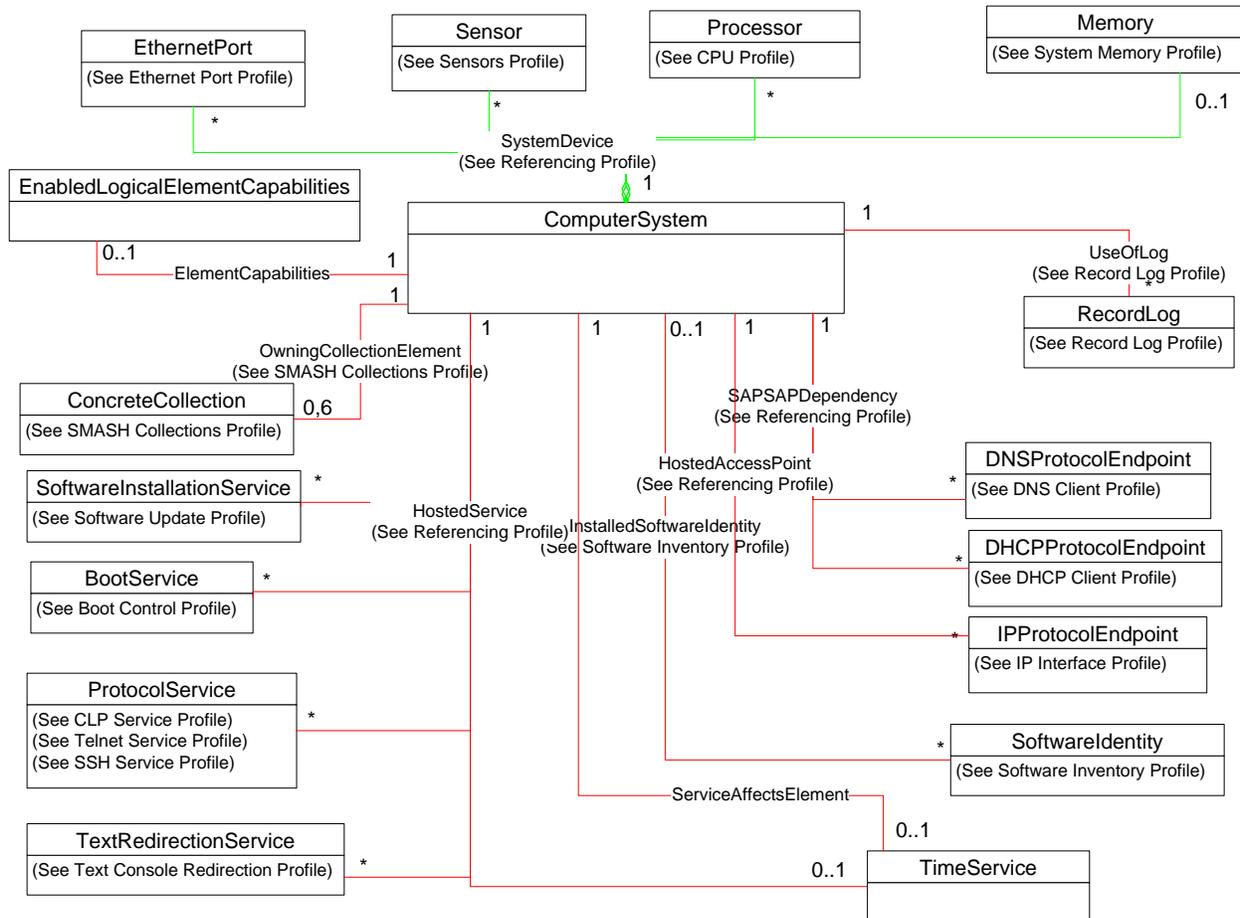

258

259

**Figure 1 – Computer System Profile: Class Diagram**

## 260 7 Implementation

261 The *Computer System Profile* consists of definitions for the classes CIM\_ComputerSystem and  
 262 CIM\_TimeService, and their related EnabledLogicalElementCapabilities classes. Other related subsystem  
 263 classes such as CIM\_LogicalDevice, CIM\_Collection, and CIM\_RecordLog are defined in their respective  
 264 profiles.

265 Requirements for propagating and formulating certain properties of the *Computer System Profile* classes  
 266 are discussed in this clause.

267 Methods are described in 8 (“Methods”), and properties are described in 10 (“CIM Elements”).

### 268 7.1 Computer System

269 The instrumentation shall create an instance of CIM\_ComputerSystem to represent the system being  
 270 modeled.

271 **7.1.1 Identifying a Computer System**

272 Name/Value pairs contained in the CIM\_ComputerSystem.OtherIdentifyingInfo and  
 273 CIM\_ComputerSystem.IdentifyingDescriptions properties should contain values that clients can use to  
 274 correlate instances of CIM\_ComputerSystem that represent the same underlying real-world system that  
 275 the specialization of the *Computer System Profile* has been instrumented to represent. The following  
 276 paragraphs detail the requirements when the OtherIdentifyingInfo and IdentifyingDescriptions properties  
 277 are implemented.

278 When the OtherIdentifyingInfo property is implemented, the IdentifyingDescriptions property shall be  
 279 implemented. The IdentifyingDescriptions property shall be formatted using the following algorithm:

280 < OrgID > : < LocalID >, where < OrgID > and < LocalID > are separated by a colon (:) and  
 281 < OrgID > shall include a copyrighted, trademarked, or otherwise unique name that is owned by the  
 282 business entity that is creating or defining the value or that is a registered ID assigned to the business  
 283 entity by a recognized global authority. In addition, to ensure uniqueness, < OrgID > shall not contain  
 284 a colon (:). When using this algorithm, the first colon to appear in the value shall appear between  
 285 < OrgID > and < LocalID >. < LocalID > is chosen by the business entity and shall be used uniquely.

286 The values listed in the "IdentifyingDescriptions Value" column of Table 2 should be used as values for  
 287 the IdentifyingDescriptions property. Every entry in Table 2 applicable for a given environment should be  
 288 specified. An entry in Table 2 shall be used only if the value for the OtherIdentifyingInfo property is  
 289 guaranteed to be globally unique across all underlying real-world systems.

290 **Table 2 – Predefined Identifiers for a Computer System**

IdentifyingDescriptions Value	OtherIdentifyingInfo Value
"CIM:GUID"	A globally unique identifier; see 7.1.1.1.
"CIM:MAC"	MAC address for one of the LAN interfaces of the system; see 7.1.1.2.
"CIM:Model:SerialNumber"	Model and serial number of the system; see 7.1.1.3.
"CIM:Tag"	Asset tag of the system; see 7.1.1.4.
"CIM:CorrelatableID"	An opaque identifier; see 7.1.1.5.

291 **7.1.1.1 CIM:GUID**

292 When the IdentifyingDescriptions property contains the value "CIM:GUID", the value of the corresponding  
 293 array index of the OtherIdentifyingInfo property shall satisfy the following constraints:

- 294 • The value shall be a globally unique identifier for the system.
- 295 • The value shall match the pattern ("^[0..9A..F]{32}\$").

296 **7.1.1.2 CIM:MAC**

297 When the IdentifyingDescriptions property contains the value "CIM:MAC", the value of the corresponding  
 298 array index of the OtherIdentifyingInfo property shall satisfy the following constraints:

- 299 • The value shall be the MAC address for one of the LAN interfaces of the system.
- 300 • The value shall be formatted as 12 contiguous uppercase hex digits (pattern  
 301 "^[0123456789ABCDEF]{12}\$").
- 302 • When the [Ethernet Port Profile](#) is implemented, the value shall match the value of the  
 303 PermanentAddress property of an instance of CIM\_EthernetPort.

**304 7.1.1.3 CIM:Model:SerialNumber**

305 When the IdentifyingDescriptions property contains the value "CIM:Model:SerialNumber", the value of the  
306 corresponding array index of the OtherIdentifyingInfo property shall be of the form < OrgID > : < LocalID >  
307 : <Model Number> : <Serial Number>, where < OrgID > and < LocalID > are separated by a colon (:), and  
308 where < OrgID > shall include a copyrighted, trademarked, or otherwise unique name that is owned by  
309 the business entity that is creating or defining the value or that is a registered ID assigned to the business  
310 entity by a recognized global authority. In addition, to ensure uniqueness, < OrgID > shall not contain a  
311 colon (:). When using this algorithm, the first colon to appear in the value shall appear between < OrgID >  
312 and < LocalID >. <LocalID> is chosen by the business entity and shall be used uniquely. <Model  
313 Number> shall be the model number of the system, and <Serial Number> shall be the serial number of  
314 the system.

**315 7.1.1.4 CIM:Tag**

316 An asset tag is a unique identifier assigned to a computer system. Generally this value is assigned by an  
317 administrator or a client application.

318 When the IdentifyingDescriptions property contains the value "CIM:Tag", the value of the corresponding  
319 array index of the OtherIdentifyingInfo property shall be a uniquely identifying tag of the system. An  
320 example is an asset tag.

**321 7.1.1.5 CIM:CorrelatableID**

322 When the IdentifyingDescriptions property contains the value "CIM:CorrelatableID", the value of the  
323 corresponding array index of the OtherIdentifyingInfo property shall contain an opaque ID that can be  
324 used to correlate instances of CIM\_ComputerSystem across namespace implementations that represent  
325 the same underlying real-world system. Underlying instrumentation shall guarantee that this value is the  
326 same for any two or more instances of CIM\_ComputerSystem that represent the same underlying real-  
327 world system.

**328 7.1.2 Modifying ElementName Is Supported**

329 The CIM\_ComputerSystem.ElementName property may support being modified by the ModifyInstance  
330 operation. See 8.4.1. This behavior is conditional upon the existence of an instance of  
331 CIM\_EnabledLogicalElementCapabilities being associated with the CIM\_ComputerSystem instance  
332 where the CIM\_EnabledLogicalElementCapabilities.ElementNameEditSupported property has the value  
333 TRUE.

334 This clause describes the CIM elements and behavior requirements when an implementation supports  
335 client modification of the CIM\_ComputerSystem.ElementName property.

**336 7.1.2.1 CIM\_EnabledLogicalElementCapabilities**

337 An instance of CIM\_EnabledLogicalElementCapabilities shall be associated with the  
338 CIM\_ComputerSystem instance through an instance of CIM\_ElementCapabilities.

**339 7.1.2.1.1 CIM\_EnabledLogicalElementCapabilities.ElementNameEditSupported**

340 The ElementNameEditSupported property shall have a value of TRUE when the implementation supports  
341 client modification of the CIM\_ComputerSystem.ElementName property.

**342 7.1.2.1.2 CIM\_EnabledLogicalElement.MaxElementNameLen**

343 The MaxElementNameLen property shall be implemented.

### 344 7.1.3 Modifying ElementName Is Not Supported

345 This clause describes the CIM elements and behaviors that shall be implemented when the  
346 CIM\_ComputerSystem.ElementName property does not support being modified by the ModifyInstance  
347 operation.

#### 348 7.1.3.1 CIM\_EnabledLogicalElementCapabilities

349 An instance of CIM\_EnabledLogicalElementCapabilities may be associated with the  
350 CIM\_ComputerSystem instance through an instance of CIM\_ElementCapabilities.

##### 351 7.1.3.1.1 CIM\_EnabledLogicalElementCapabilities.ElementNameEditSupported

352 The ElementNameEditSupported property shall have a value of FALSE when the implementation does  
353 not support client modification of the CIM\_ComputerSystem.ElementName property.

##### 354 7.1.3.1.2 CIM\_EnabledLogicalElement.MaxElementNameLen

355 The MaxElementNameLen property may be implemented. The MaxElementNameLen property is  
356 irrelevant in this context.

### 357 7.1.4 Managing System Time

358 A system can maintain an internal clock, which provides the system with the current time (for example, to  
359 provide time stamps for log entries). The management of the current time of the system may be  
360 supported. This behavior is optional. See 8.2 for requirements for the ManageTime() method.

#### 361 7.1.4.1 Managing System Time Is Supported

362 If the management of the current time of the system is supported, it should be implemented in  
363 conformance with this profile. If the management of the current time of the system is supported in  
364 conformance with this profile, the requirements specified in this clause shall be met.

365 An instance of CIM\_TimeService shall be associated with the Central Instance through the  
366 CIM\_HostedService association. The instance of CIM\_TimeService shall also be associated with the  
367 Central Instance through the CIM\_ServiceAffectsElement association. Management of system time is  
368 supported when the CIM\_TimeService.ManageTime() method is supported for at least one value for the  
369 GetRequest parameter.

#### 370 7.1.4.2 Managing System Time Is Not Supported

371 When the management of system time is not supported, no instance of CIM\_TimeService shall be  
372 associated with the Central Instance through the CIM\_ServiceAffectsElement association.

## 373 7.2 Management of Computer System Components

374 The following subclauses detail the requirements for management of components of the system.

### 375 7.2.1 Instrumentation of Processors

376 If the processors of the system are instrumented, the instrumentation should be conformant with the [CPU](#)  
377 [Profile](#). If the processors of the system are instrumented in conformance with the [CPU Profile](#), the Central  
378 Instance of the *Computer System Profile* shall be associated with the Central Instance of the [CPU Profile](#)  
379 through the CIM\_SystemDevice association.

### 380 7.2.2 Instrumentation of System Memory

381 If the memory of the system is modeled, the [System Memory Profile](#) should be implemented. If the  
382 system memory is modeled in conformance with the [System Memory Profile](#), the Central Instance of the

383 *Computer System Profile* shall be associated with the Central Instance of the [System Memory Profile](#)  
384 through the CIM\_SystemDevice association.

### 385 **7.2.3 Instrumentation of Sensors**

386 A system can contain one or more sensors that monitor components within the system. If the sensors of  
387 the system are instrumented, the instrumentation should be conformant with the [Sensors Profile](#). If the  
388 sensors of the system are instrumented in conformance with the [Sensors Profile](#), the Central Instance of  
389 the *Computer System Profile* shall be associated with the Central Instance of the [Sensors Profile](#) through  
390 the CIM\_SystemDevice association.

## 391 **7.3 Software Asset Management**

392 This clause describes behavioral requirements for the management of software asset information for the  
393 system.

### 394 **7.3.1 Software Inventory Support**

395 The inventory of software installed on or for the system may be modeled. If the inventory of software  
396 installed on or for the system is modeled, the [Software Inventory Profile](#) should be implemented. If the  
397 inventory of software installed on or for the system is modeled in conformance with the [Software](#)  
398 [Inventory Profile](#), at least one instance of CIM\_SoftwareIdentity shall be associated with the Central  
399 Instance of the *Computer System Profile* through the CIM\_InstalledSoftwareIdentity association, or  
400 exactly one instance of CIM\_SystemSpecificCollection shall be implemented in accordance with the  
401 requirements specified in the "Representing Available Software" clause of the [Software Inventory Profile](#)  
402 and associated with the Central Instance of the *Computer System Profile* through the  
403 CIM\_HostedCollection association.

404

---

## 405 **EXPERIMENTAL**

### 406 **7.3.2 Software Update Support**

407 Management of software updates for the system or components contained in the system may be  
408 supported. If the management of software updates for a component installed in the system is supported,  
409 the [Software Update Profile](#) should be implemented. If the management of software updates for a  
410 component installed in the system is supported in conformance with the [Software Update Profile](#), the  
411 instance of a subclass of CIM\_ManagedElement that represents the component shall be associated with  
412 the Central Instance of the [Software Update Profile](#) through the CIM\_ServiceAffectsElement association.

413 If the management of software updates for the system is supported in conformance with the [Software](#)  
414 [Update Profile](#), the Central Instance of the *Computer System Profile* shall be associated with the Central  
415 Instance of the [Software Update Profile](#) through the CIM\_ServiceAffectsElement association.

416 If the system provides the ability to perform software updates for itself or other systems in conformance  
417 with the [Software Update Profile](#), the Central Instance of the *Computer System Profile* shall be associated  
418 with the Central Instance of the [Software Update Profile](#) through the CIM\_HostedService association.

## 419 **EXPERIMENTAL**

---

## 420 **7.4 Network Interface Management**

421 This clause describes the requirements for the management of network interfaces of the system.

#### 422 7.4.1 Ethernet Interface Management

423 If the Ethernet interfaces of the system are instrumented, the instrumentation should be conformant with  
424 the [Ethernet Port Profile](#). If the Ethernet Interfaces of the system are instrumented in conformance with  
425 the [Ethernet Port Profile](#), at least one instance of CIM\_EthernetPort shall be associated with the Central  
426 Instance of the *Computer System Profile* through the CIM\_SystemDevice association.

#### 427 7.4.2 IP Interface Management

428 If the management of one or more IP interfaces of the system is supported, the [IP Interface Profile](#) should  
429 be implemented. If the management of one or more IP interfaces of the system is supported in  
430 conformance with the [IP Interface Profile](#), the Central Instance of the *Computer System Profile* shall be  
431 associated with the Central Instance of the [IP Interface Profile](#) through the CIM\_HostedAccessPoint  
432 association.

433 If the system provides the optional behavior of managing alternate configurations for the IP interface in  
434 conformance with the [IP Interface Profile](#), the instance of CIM\_IPConfigurationService specified by the [IP  
435 Interface Profile](#) shall be associated with the Central Instance of the *Computer System Profile* through the  
436 CIM\_HostedService association.

#### 437 7.4.3 DHCP Client Management

438 If the DHCP client of the system is modeled, the [DHCP Client Profile](#) should be implemented. If the DHCP  
439 client of the system is modeled in conformance with the [DHCP Client Profile](#), at least one instance of  
440 CIM\_DHCPProtocolEndpoint shall be associated with the Central Instance of the *Computer System  
441 Profile* through the CIM\_HostedAccessPoint association.

#### 442 7.4.4 DNS Client Management

443 If the DNS client of the system is modeled, the [DNS Client Profile](#) should be implemented. If the DNS  
444 client of the system is modeled in conformance with the [DNS Client Profile](#), at least one instance of  
445 CIM\_DNSProtocolEndpoint shall be associated with the Central Instance of the *Computer System Profile*  
446 through the CIM\_HostedAccessPoint association.

### 447 7.5 Record Logs

448 Error and event information about a system can be recorded in one or more record logs. If a record log  
449 that contains information about the system is instrumented, the [Record Log Profile](#) should be  
450 implemented. If a record log that contains information about a system is instrumented in conformance  
451 with the [Record Log Profile](#), the Central Instance of the *Computer System Profile* shall be associated with  
452 the Central Instance of the [Record Log Profile](#) through the CIM\_UseOfLog association.

### 453 7.6 Management of Protocol Services

454 This clause describes behavioral requirements for the management of protocol services hosted on the  
455 system.

#### 456 7.6.1 Hosting a CLP Service

457 The system may host one or more CLP services. If the system hosts at least one CLP service, the [CLP  
458 Service Profile](#) should be implemented. If a CLP service that is hosted by the system is modeled in  
459 conformance with the [CLP Service Profile](#), the Central Instance of the *Computer System Profile* shall be  
460 associated with the Central Instance of the [CLP Service Profile](#) through the CIM\_HostedService  
461 association.

## 462 7.6.2 Hosting an SSH Service

463 The system may host one or more SSH services. If the system hosts at least one SSH service, the [SSH](#)  
464 [Service Profile](#) should be implemented. If a SSH service that is hosted by the system is modeled in  
465 conformance with the [SSH Service Profile](#), the Central Instance of the *Computer System Profile* shall be  
466 associated with the Central Instance of the [SSH Service Profile](#) through the CIM\_HostedService  
467 association.

## 468 7.6.3 Hosting a Telnet Service

469 The system may host one or more telnet services. If the system hosts at least one telnet service, the  
470 [Telnet Service Profile](#) should be implemented. If a telnet service that is hosted by the system is modeled  
471 in conformance with the [Telnet Service Profile](#), the Central Instance of the *Computer System Profile* shall  
472 be associated with the Central Instance of the [Telnet Service Profile](#) through the CIM\_HostedService  
473 association.

## 474 7.7 System Lifecycle Management

475 The following subclauses detail requirements related to lifecycle management of the system.

### 476 7.7.1 System State Management

477 This clause details the requirements for representing and managing the state of a computer system.

#### 478 7.7.1.1 Representing Current System State

479 The current state and last requested state for a computer system may be modeled using the  
480 EnabledState and RequestedState properties of CIM\_ComputerSystem. This behavior is optional.

481 When modeling system state is supported, the CIM\_ComputerSystem.EnabledState property shall have a  
482 value corresponding to the current state of the system and shall not have the value 12 (Not Applicable).  
483 The CIM\_ComputerSystem.RequestedState property shall not have the value 5 (Not Applicable). The  
484 system state can change; therefore, the values of the RequestedState and EnabledState properties may  
485 still change even when the optional behavior in 7.7.1.2 is not implemented.

486 When modeling system state is not supported, the CIM\_ComputerSystem.EnabledState property shall  
487 have the value 12 (Not Applicable) and the CIM\_ComputerSystem.RequestedState property shall have  
488 the value 5 (Not Applicable).

#### 489 7.7.1.2 Client State Management Is Supported

490 The EnabledState and RequestedState properties and the RequestStateChange() method of  
491 CIM\_ComputerSystem are used to perform basic lifecycle and state management of abstract systems.  
492 Common lifecycle states and state changes (for example, enable, disable, and reset) can be managed  
493 using these CIM elements. Specializations of this profile define semantics for each state and state  
494 change specific to the management domain targeted by the specializing profile.

495 When management of the state of a system is supported, exactly one instance of  
496 CIM\_EnabledLogicalElementCapabilities shall be associated with the CIM\_ComputerSystem instance  
497 through an instance of CIM\_ElementCapabilities.

498 Even when client state management is supported, the values of the RequestedState and EnabledState  
499 properties may still change implicitly to reflect state changes and requests that were not initiated by a  
500 client of the instrumentation.

501 Support for managing the state of the system is optional behavior. This clause describes the CIM  
502 elements and behaviors that shall be implemented when this behavior is supported.

**503 7.7.1.2.1 CIM\_EnabledLogicalElementCapabilities**

504 When state management is supported, exactly one instance of CIM\_EnabledLogicalElementCapabilities  
505 shall be associated with the CIM\_ComputerSystem instance through an instance of  
506 CIM\_ElementCapabilities.

**507 7.7.1.2.1.1 CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported**

508 The RequestedStatesSupported property may contain zero or more values.

**509 7.7.1.2.2 CIM\_ComputerSystem.RequestedState**

510 When the CIM\_ComputerSystem.RequestStateChange() method is successfully invoked, the value of the  
511 RequestedState property shall be the value of the RequestedState parameter. If the method is not  
512 successfully invoked, the value of the RequestedState property is indeterminate.

513 The CIM\_ComputerSystem.RequestedState property shall have one of the values specified in the  
514 CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported property or a value of 5 (No  
515 Change). A value of 5 (No Change) shall indicate that the instrumentation is not aware of a request to  
516 change the state of the managed system.

**517 7.7.1.2.3 CIM\_ComputerSystem.EnabledState**

518 When the RequestedState parameter has a value of 2 (Enabled) or 3 (Disabled) and the  
519 CIM\_ComputerSystem.RequestStateChange() method completes successfully, the value of the  
520 EnabledState property shall equal the value of the CIM\_ComputerSystem.RequestedState property.

521 If the method does not complete successfully, the value of the EnabledState property is indeterminate.

**522 7.7.1.3 Client State Management Is Not Supported**

523 This clause describes the CIM elements and behaviors that shall be implemented when client state  
524 management is not supported.

**525 7.7.1.3.1 CIM\_EnabledLogicalElementCapabilities**

526 When client state management is not supported, exactly one instance of  
527 CIM\_EnabledLogicalElementCapabilities may be associated with the CIM\_ComputerSystem instance  
528 through an instance of CIM\_ElementCapabilities.

**529 7.7.1.3.1.1 CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported**

530 The CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported property shall not contain any  
531 values.

**532 7.7.2 Boot Control**

533 This clause describes the behavioral requirements for modeling and managing the boot process and  
534 configuration of the managed system.

**535 7.7.2.1 Boot Configuration Management Is Not Supported**

536 When management of boot configurations and the boot process is not supported for the system, the  
537 managed system may initiate its boot process when it is enabled.

**538 7.7.2.2 Boot Configuration Management Is Supported**

539 Management of boot configurations and the boot process may be supported for the system. This clause  
540 describes the requirements when the management of boot configurations and the boot process is  
541 supported.

542 If the instrumentation of the boot configurations and the boot process is supported, the instrumentation  
543 should be conformant with the [Boot Control Profile](#). If the instrumentation of the boot configurations and  
544 the boot process is in conformance with the [Boot Control Profile](#), the Central Instance of the *Computer  
545 System Profile* shall be associated with the Central Instance of the [Boot Control Profile](#) through the  
546 CIM\_ServiceAffectsElement association.

### 547 7.7.2.3 Hosting a Boot Service

548 The system may provide the ability to manage the boot configurations and control the boot process of  
549 itself or other systems. If the system provides this ability, the [Boot Control Profile](#) should be implemented.  
550 If the modeling of ability to manage the boot configurations and control the boot process of itself or other  
551 systems is in conformance with the [Boot Control Profile](#), the Central Instance of the *Computer System  
552 Profile* shall be associated with the Central Instance of the [Boot Control Profile](#) through the  
553 CIM\_HostedService association.

## 554 7.8 Smash Collections Profile

555 The [SMASH Collections Profile](#) may be implemented. If the [SMASH Collections Profile](#) is implemented,  
556 each instance of CIM\_ConcreteCollection defined by the [SMASH Collections Profile](#) shall be associated  
557 with the Central Instance the *Computer System Profile* through the CIM\_OwningCollectionElement  
558 association.

## 559 8 Methods

560 This clause details the requirements for supporting intrinsic operations and extrinsic methods for the CIM  
561 elements defined by this profile.

### 562 8.1 CIM\_ComputerSystem.RequestStateChange()

563 Invoking the CIM\_ComputerSystem.RequestStateChange() method changes the element's state to the  
564 value specified in the RequestedState parameter. The values 2 (Enabled) and 3 (Disabled) of the  
565 RequestedState parameter correspond to enabling or disabling the system. A value of 2 (Enabled) shall  
566 correspond to a request to enable the system. A value of 3 (Disabled) shall correspond to a request to  
567 disable the system. A value of 11 (Reset) shall be equivalent to invoking the method with a value of 3  
568 (Disabled), waiting for the operation to complete, and then invoking the method with a value of 2  
569 (Enabled).

570 See clause 7.7.1.2.2 for information about the effect of this method on the RequestedState property.

571 The method shall be considered successful if the state of the system upon completion of the method  
572 corresponds to the desired state indicated by the RequestedState parameter. An actual change in state  
573 does not need to occur for the method to be considered successful; the resultant state only needs to be  
574 equal to the requested state. When the method completes successfully, the return value shall be zero.

575 See clause 7.7.1.2.3 for information about the effect of this method on the EnabledState property.

576 Detailed requirements of the RequestStateChange() method are specified in Table 3 and Table 4.

577 No standard messages are defined.

578 Invoking the CIM\_ComputerSystem.RequestStateChange() method multiple times could result in earlier  
579 requests being overwritten or lost.

580 **Table 3 – CIM\_ComputerSystem.RequestStateChange() Method: Return Code Values**

Value	Description
0	Request was successfully executed.
1	Method is unsupported in the implementation.
2	Error occurred
0x1000	Job started: REF returned to started CIM_ConcreteJob

581 **Table 4 – CIM\_ComputerSystem.RequestStateChange() Method: Parameters**

Qualifiers	Name	Type	Description/Values
IN, REQ	RequestedState	uint16	Valid state values : 2 (Enabled) 3 (Disabled) 11 (Reset)
OUT	Job	CIM_ConcreteJob REF	Returned if job started
IN, REQ	TimeoutPeriod	datetime	Client specified the maximum amount of time the transition to a new state is supposed to take: 0 or NULL – No time requirements <interval> – Maximum time allowed

582 **8.1.1 CIM\_ComputerSystem.RequestStateChange() Conditional Support**

583 When the CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported property contains at least  
584 one value, the CIM\_ComputerSystem.RequestStateChange() method shall be implemented and  
585 supported. The CIM\_ComputerSystem.RequestStateChange() method shall not return a value of 1 (Not  
586 Supported).

587 **8.2 CIM\_TimeService.ManageTime( )**

588 The CIM\_TimeService.ManageTime() method is used to query or modify the system time. When the  
589 GetRequest parameter has a value of TRUE, the TimeData parameter shall be ignored. When the  
590 ManagedElement parameter is not a reference to the Central Instance, the method shall return a value of  
591 2. When the method is not supported for the specified value of GetRequest, the method shall return a  
592 value of 2.

593 When the GetRequest parameter is TRUE and the method completes successfully, the value of the  
594 TimeData parameter shall be an absolute date-time and shall not be an interval. When the value of the  
595 GetRequest parameter is FALSE, and the TimeData parameter is expressed as an interval, the method  
596 shall return a value of 2.

597 CIM\_TimeService.ManageTime() method's detailed requirements shall be as specified in Table 5 and  
598 Table 6.

599 No standard messages are defined for this method.

600 **Table 5 – CIM\_TimeService.ManageTime() Method: Return Code Values**

Value	Description
0	Request was successfully executed.
1	Method is not supported in the implementation.
2	Error occurred

601 **Table 6 – CIM\_TimeService.ManageTime() Method: Parameters**

Qualifiers	Name	Type	Description/Values
IN	GetRequest	Boolean	Indicates whether the request is to get (TRUE) or set (FALSE) the time for the specified element
IN / OUT	TimeData	datetime	On input, this is the desired value for the system time. On output, this is the system time.
IN	ManagedElement	CIM_Managed Element	Reference to the Central Instance

602 **8.3 Profile Conventions for Operations**603 This profile specification defines operations in terms of [DSP0200](#).604 For each profile class (including associations), the implementation requirements for operations, including  
605 those in the following default list, are specified in class-specific subclauses of this clause.

606 The default list of operations is as follows:

- 607 • Associators( )
- 608 • AssociatorNames( )
- 609 • EnumerateInstances( )
- 610 • EnumerateInstanceNames( )
- 611 • GetInstance( )
- 612 • References( )
- 613 • ReferenceNames( )

614 **8.4 CIM\_ComputerSystem**615 Table 7 lists implementation requirements for operations. If implemented, these operations shall be  
616 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 7, all operations in  
617 the default list in 8.3 shall be implemented as defined in [DSP0200](#).

618 NOTE: Related profiles may define additional requirements on operations for the profile class.

619 **Table 7 – Operations: CIM\_ComputerSystem**

Operation	Requirement	Messages
ModifyInstance	Optional. See 8.4.1.	None

620 **8.4.1 CIM\_ComputerSystem — ModifyInstance**621 This clause details the requirements for the ModifyInstance operation applied to an instance of  
622 CIM\_ComputerSystem. The ModifyInstance operation may be supported.

623 The ModifyInstance operation shall be supported and the CIM\_ComputerSystem.ElementName property  
 624 shall be modifiable when an instance of CIM\_EnabledLogicalElementCapabilities is associated with the  
 625 CIM\_ComputerSystem instance and the ElementNameEditSupported property of the  
 626 CIM\_EnabledLogicalElementCapabilities instance associated with the CIM\_ComputerSystem instance  
 627 has a value of TRUE (see 8.4.1.1).

628 **8.4.1.1 CIM\_ComputerSystem.ElementName**

629 When an instance of CIM\_EnabledLogicalElementCapabilities is associated with the  
 630 CIM\_ComputerSystem instance and the ElementNameEditSupported property of the  
 631 CIM\_EnabledLogicalElementCapabilities instance associated with the CIM\_ComputerSystem instance  
 632 has a value of TRUE, the implementation shall allow the ModifyInstance operation to change the value of  
 633 the ElementName property of the CIM\_ComputerSystem instance. The ModifyInstance operation shall  
 634 enforce the length restriction specified in the MaxElementNameLen property of the  
 635 CIM\_EnabledLogicalElementCapabilities instance.

636 When an instance of CIM\_EnabledLogicalElementCapabilities is associated with the  
 637 CIM\_ComputerSystem instance and the ElementNameEditSupported property of the  
 638 CIM\_EnabledLogicalElementCapabilities has a value of FALSE or no instance of  
 639 CIM\_EnabledLogicalElementCapabilities is associated with the CIM\_ComputerSystem instance, the  
 640 implementation shall not allow the ModifyInstance operation to change the value of the ElementName  
 641 property of the CIM\_ComputerSystem instance.

642 **8.5 CIM\_ElementCapabilities**

643 Table 8 lists implementation requirements for operations. If implemented, these operations shall be  
 644 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 8, all operations in  
 645 the default list in 8.3 shall be implemented as defined in [DSP0200](#).

646 NOTE: Related profiles may define additional requirements on operations for the profile class.

647 **Table 8 – Operations: CIM\_ElementCapabilities**

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

648 **8.6 CIM\_EnabledLogicalElementCapabilities**

649 All operations in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

650 NOTE: Related profiles may define additional requirements on operations for the profile class.

651 **8.7 CIM\_HostedService**

652 Table 9 lists implementation requirements for operations. If implemented, these operations shall be  
 653 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 9, all operations in  
 654 the default list in 8.3 shall be implemented as defined in [DSP0200](#).

655 NOTE: Related profiles may define additional requirements on operations for the profile class.

656

**Table 9 – Operations: CIM\_HostedService**

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

## 657 8.8 CIM\_ServiceAffectsElement

658 Table 10 lists implementation requirements for operations. If implemented, these operations shall be  
 659 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 10, all operations  
 660 in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

661 NOTE: Related profiles may define additional requirements on operations for the profile class.

662

**Table 10 – Operations: CIM\_ServiceAffectsElement**

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

## 663 8.9 CIM\_TimeService

664 All operations in the default list in 8.3 shall be implemented as defined in [DSP0200](#).


665 NOTE: Related profiles may define additional requirements on operations for the profile class.

## 666 9 Use Cases

667 The following use cases and object diagrams illustrate use of the *Computer System Profile*. They are for  
 668 informational purposes only and do not introduce behavioral requirements for implementations of the  
 669 profile.

### 670 9.1 Object Diagrams

671 The object diagram in Figure 2 shows an abstract system in which the optional state management and  
 672 time management behaviors are supported as well as the [CPU Profile](#) and [System Memory Profile](#).

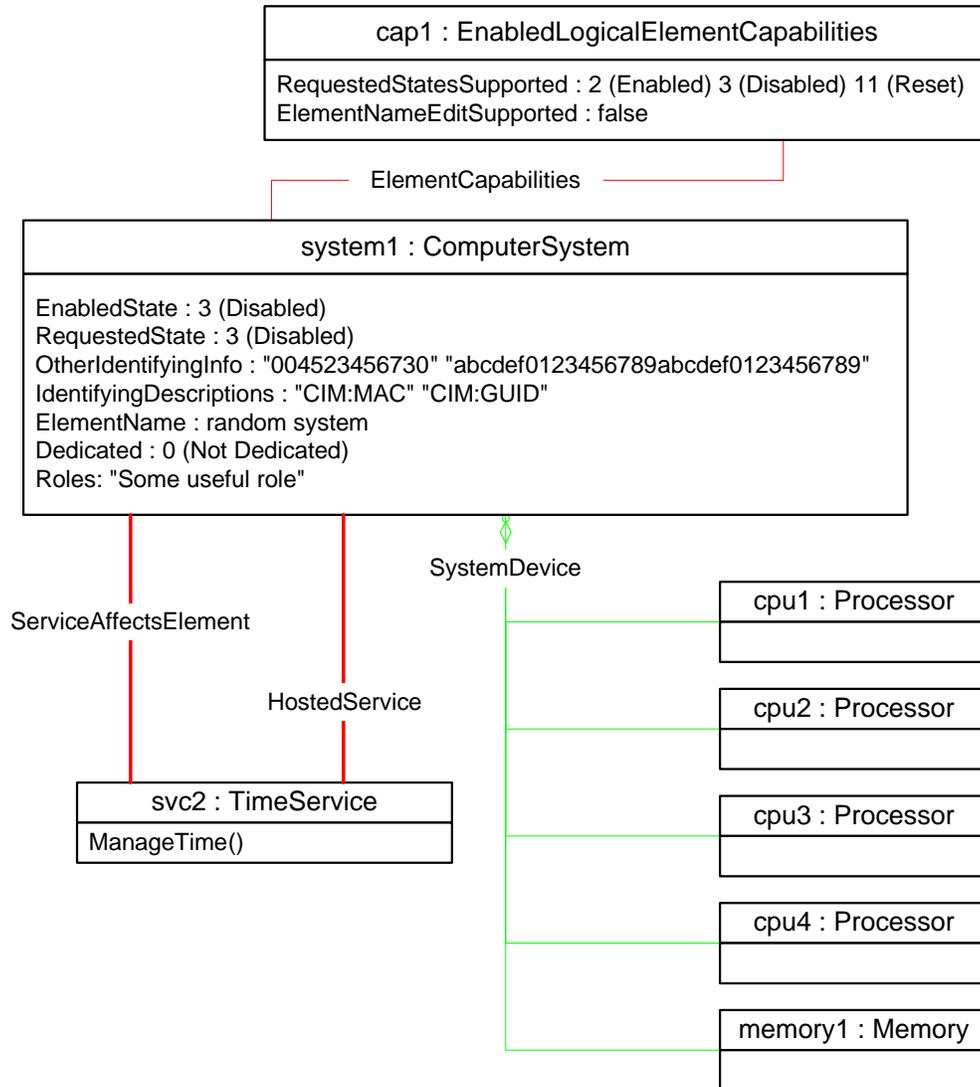

673

674

Figure 2 – Logical Topology



- 700 5) If there is a match, then the instance of CIM\_ComputerSystem from step 4) is instrumented for  
701 the same real-world system as instance A. For each name/value pair for the instance, if it is not  
702 already in the set of identification pairs known by the client for the system, add it to the set.
- 703 6) If a new identification pair was added in step 5), go back to step 4) and retest each instance of  
704 CIM\_ComputerSystem.

#### 705 9.4 Enable a System

706 A client can enable a system as follows:

- 707 1) Look for an instance of CIM\_EnabledLogicalElementCapabilities associated with the target  
708 instance through the CIM\_ElementCapabilities association.
- 709 2) Verify that the CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported property  
710 contains the value 2 (Enabled).
- 711 3) Invoke the RequestStateChange() method on the target instance, specifying 2 (Enabled) for the  
712 RequestedState parameter.

#### 713 9.5 Disable a System

714 A client can disable a system as follows:

- 715 1) Look for an instance of CIM\_EnabledLogicalElementCapabilities associated with the Central  
716 Instance through the CIM\_ElementCapabilities association.
- 717 2) Verify that the CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported property  
718 contains the value 3 (Disabled).
- 719 3) Invoke the RequestStateChange() method on the target instance, specifying 3 (Disabled) for  
720 the RequestedState parameter.

#### 721 9.6 Reset a System

722 A client can reset a system as follows:

- 723 1) Look for an instance of CIM\_EnabledLogicalElementCapabilities associated with the target  
724 instance through the CIM\_ElementCapabilities association.
- 725 2) Verify that the CIM\_EnabledLogicalElementCapabilities.RequestedStatesSupported property  
726 contains the value 11 (Reset).
- 727 3) Invoke the RequestStateChange() method on the target instance, specifying 11 (Reset) for the  
728 RequestedState parameter.

#### 729 9.7 Manage the System Boot Configuration

730 A client can verify that an instance of CIM\_RegisteredProfile for the [Boot Control Profile](#) exists using  
731 either the central class or scoping class methodology as described in [Profile Registration Profile](#). If it  
732 exists, a client can determine whether management of the system boot configuration is supported by  
733 searching for an instance of CIM\_BootService that is conformant with the [Boot Control Profile](#) and  
734 associated with the Central Instance of the *Computer System Profile* through the  
735 CIM\_ServiceAffectsElement association. The specific use cases for managing the system boot  
736 configuration are documented in the [Boot Control Profile](#).

#### 737 9.8 Determine the Number of Processors in the System

738 A client can verify that an instance of CIM\_RegisteredProfile for the [CPU Profile](#) exists using either the  
739 central class or scoping class methodology as described in [Profile Registration Profile](#). If it exists, then the  
740 CPU profile is implemented. When the optional [CPU Profile](#) is implemented, the client can determine the  
741 number of processors in the system by querying for instances of CIM\_Processor that are conformant with

742 the [CPU Profile](#) and associated with the Central Instance of the *Computer System Profile* through the  
743 CIM\_SystemDevice association.

## 744 **9.9 Determine If Time Management Is Supported**

745 To determine if time management is supported, the client can look for an instance of CIM\_TimeService  
746 associated with the target instance through the CIM\_ServiceAffectsElement association.

## 747 **9.10 Get Time for System**

748 A client can determine the system time by first using the steps in 9.9 to determine if time management is  
749 supported and find the associated instance of CIM\_TimeService. The client can then invoke the  
750 CIM\_TimeService.ManageTime() method, specifying a value of TRUE for the value of the GetRequest  
751 parameter and a reference to the target instance for the value of the ManagedElement parameter.

## 752 **9.11 Set Time for System**

753 A client can determine the system time by first using the steps in 9.9 to determine if time management is  
754 supported and find the associated instance of CIM\_TimeService. The client can then invoke the  
755 CIM\_TimeService.ManageTime() method, specifying a value of FALSE for the value of the GetRequest  
756 parameter, the desired time for the value of the TimeData parameter, and a reference to the target  
757 instance for the value of the ManagedElement parameter.

## 758 **9.12 Determining If ElementName Can Be Modified**

759 For a given instance of CIM\_ComputerSystem, a client can determine whether the ElementName  
760 property can be modified as follows:

- 761 1) Find the CIM\_EnabledLogicalElementCapabilities instance that is associated with the target  
762 instance.
- 763 2) If an instance of CIM\_EnabledLogicalElementCapabilities is not found, client cannot modify the  
764 ElementName property.
- 765 3) Query the value of the ElementNameEditSupported property of the  
766 CIM\_EnabledLogicalElementCapabilities instance. If the value is TRUE, the client can modify  
767 the ElementName property of the target instance.

## 768 **9.13 Determining If State Management Is Supported**

769 For a given instance of CIM\_ComputerSystem, a client can determine whether state management is  
770 supported as follows:

- 771 1) Find the CIM\_EnabledLogicalElementCapabilities instance that is associated with the target  
772 instance.
- 773 2) If an instance of CIM\_EnabledLogicalElementCapabilities is not found, state management is not  
774 supported.
- 775 3) Query the value of the RequestedStatesSupported property. If at least one value is specified,  
776 state management is supported.

777 **10 CIM Elements**

778 Table 11 shows the instances of CIM Elements for this profile. Instances of the CIM elements shall be  
 779 implemented as described in Table 11. Clauses 7 (“Implementation”) and 8 (“Methods”) may impose  
 780 additional requirements on these elements.

781 **Table 11 – CIM Elements: Computer System Profile**

Element Name	Requirement	Description
<b>Classes</b>		
CIM_ComputerSystem	Mandatory	See 10.1.
CIM_ElementCapabilities	Optional	See 10.2.
CIM_EnabledLogicalElementCapabilities	Optional	See 10.3.
CIM_HostedService	Optional	See 10.4.
CIM_ServiceAffectsElement	Optional	See 10.5.
CIM_TimeService	Optional	See 10.6.
<b>Indications</b>		
None defined in this profile		

782 **10.1 CIM\_ComputerSystem**

783 An instance of CIM\_ComputerSystem is used to represent the system. Table 12 contains the  
 784 requirements for elements of this class.

785 **Table 12 – Class: CIM\_ComputerSystem**

Elements	Requirement	Description
Name	Mandatory	<b>Key</b>
CreationClassName	Mandatory	<b>Key</b>
OtherIdentifyingInfo	Optional	See 7.1.1.
IdentifyingDescriptions	Optional	See 7.1.1.
EnabledState	Mandatory	See 7.7.1.
RequestedState	Mandatory	See 7.7.1.2.2.
OperationalStatus	Mandatory	None
HealthState	Mandatory	None
ElementName	Mandatory	See 7.1.2 and 7.1.3.
RequestStateChange( )	Conditional	See 8.1.

786 **10.2 CIM\_ElementCapabilities**

787 CIM\_ElementCapabilities associates an instance of CIM\_EnabledLogicalElementCapabilities with an  
 788 instance of CIM\_ComputerSystem. Table 13 contains the requirements for elements of this class.

789 **Table 13 – Class: CIM\_ElementCapabilities**

Elements	Requirement	Notes
ManagedElement	Mandatory	This property shall be a reference to an instance of CIM_ComputerSystem. Cardinality 1..*
Capabilities	Mandatory	This property shall be a reference to the instance of CIM_EnabledLogicalElementCapabilities. Cardinality 0..1

790 **10.3 CIM\_EnabledLogicalElementCapabilities**

791 CIM\_EnabledLogicalElementCapabilities indicates support for managing the state of the system.  
 792 Table 14 contains the requirements for elements of this class.

793 **Table 14 – Class: CIM\_EnabledLogicalElementCapabilities**

Elements	Requirement	Notes
InstanceID	Mandatory	<b>Key</b>
RequestedStatesSupported	Mandatory	See 7.7.1.2.1.1 and 7.7.1.3.1.1.
ElementNameEditSupported	Mandatory	See 7.1.2.1.1 and 7.1.3.1.1.
MaxElementNameLen	Conditional	See 7.1.2.1.2 and 7.1.3.1.2.

794 **10.4 CIM\_HostedService**

795 CIM\_HostedService relates the CIM\_TimeService to its scoping CIM\_ComputerSystem instance.  
 796 Table 15 contains the requirements for elements of this class.

797 **Table 15 – Class: CIM\_HostedService**

Elements	Requirement	Notes
Antecedent	Mandatory	This property shall reference the Central Instance. Cardinality 1
Dependent	Mandatory	This property shall reference CIM_TimeService. Cardinality 0..1

798 **10.5 CIM\_ServiceAffectsElement**

799 CIM\_ServiceAffectsElement associates the CIM\_TimeService instance with the Central Instance.  
 800 Table 16 contains the requirements for elements of this class.

801 **Table 16 – Class: CIM\_ServiceAffectsElement**

Elements	Requirement	Notes
AffectedElement	Mandatory	This property shall be a reference to the Central Instance. Cardinality 1
AffectingElement	Mandatory	This property shall be a reference to an instance of CIM_TimeService. Cardinality 0..1
ElementEffects	Mandatory	Matches 5 (Manages)

802 **10.6 CIM\_TimeService**

803 CIM\_TimeService manages the current time on the system. Table 17 contains the requirements for  
 804 elements of this class.

805 **Table 17 – Class: CIM\_TimeService**

Elements	Requirement	Notes
SystemCreationClassName	Mandatory	<b>Key</b>
SystemName	Mandatory	<b>Key</b>
CreationClassName	Mandatory	<b>Key</b>
Name	Mandatory	<b>Key</b>
ElementName	Mandatory	Pattern (“.*”). See clauses 7 and 8.
ManageTime( )	Mandatory	See 8.2.

806  
807  
808  
809**ANNEX A  
(Informative)****Change Log**

<b>Version</b>	<b>Date</b>	<b>Description</b>
1.0.0b	2006-08-28	Released as Preliminary Standard
1.0.0	2008-12-08	Released as Final Standard
1.0.1	2010-04-22	Released as DMTF Standard. This errata release ensures that other profiles can reference the ComputerSystem profile and corrects a wrong association used in a diagram. Experimental Qualifiers have been removed for classes and profiles that have gone Final or been released as DMTF Standard.

810